

HSF





ROHS

Material:0.25 phosphor bronze  
 Finish:Nickel-plated  
 Coating Parameters:4um  
 Temperature Range:-40℃ 270℃  
 Voltage Parameters:270V  
 Order code:



BS - S - SI - A - CR2033A

① ② ③ ④ ⑤

- ① BS: Battery Contacts
- ② Apperance for the product  
M:SMT TYPE  
S:180 TYPE  
R:90 TYPE
- ③ Contact Plating  
SI:Nickel Plate  
SN:Tin  
G0:Gold flash  
G1: 3U" Gold  
G2: 5U" Gold  
G3:10U" Gold  
G4:15U" Gold  
G5:30U" Gold
- ④ Packing method  
A: Tray packing  
R: Tape & reel packing
- ⑤ Product number  
CR2033A

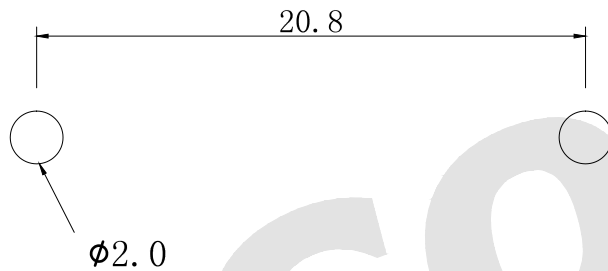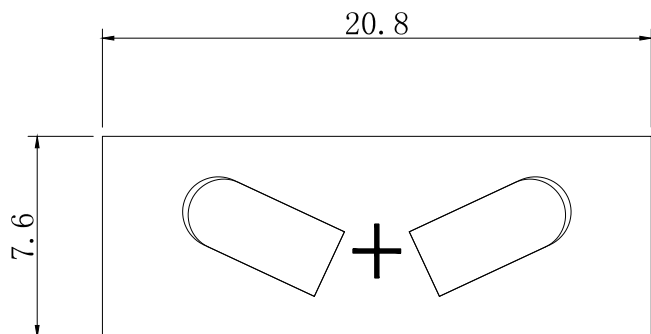

PCB LAYOUT

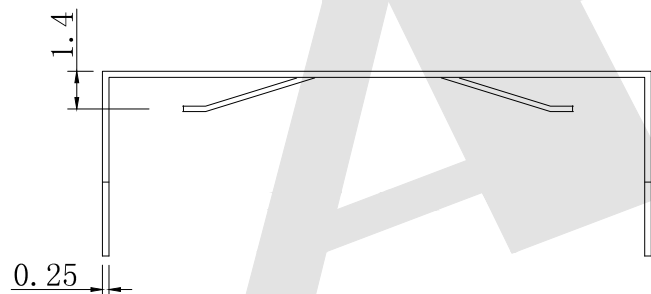

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX:±0.20  
 X.X:±0.25 X.XXX:±0.15


**Atkconn**® ATKCONN ELECTRONICS CO., LTD  
[Http://www.atkconn.com](http://www.atkconn.com)

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 21/07/2022
CHECK BobYang	DATE 21/07/2022

TITLE: Battery Contacts For CR2025 CR2032

DRAWING NO: BS-S-SI-A-CR2033A

PRODUCT NO: BS-S-SI-A-CR2033A



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		