



NOTE:
1. BASE:

MAT'L. .020[0.50] TH'K STEEL

SPRING CONTACT:

MAT'L. .023[0.58] DIA. MUSI WIRE

2. COATING PARAMETERS:4um

3. TEMPERATURE RANGE:-40° C - 270° C

4. VOLTAGE PARAMETERS:270V

BS - S - SI - B - CR309

① ② ③ ④ ⑤

① BS: Battery Contacts

② Apperance for the product

M:SMT TYPE

S:180 TYPE

R:90 TYPE

③ Contact Plating

SI:Nickel Plate

SN:Tin

G0:Gold flash

G1: 3U" Gold

G2: 5U" Gold

G3:10U" Gold

G4:15U" Gold

G5:30U" Gold

④ Packing method


A: Tray packing

B:BAG PACKING

R: Tape & reel packing

⑤ Product number

CR309

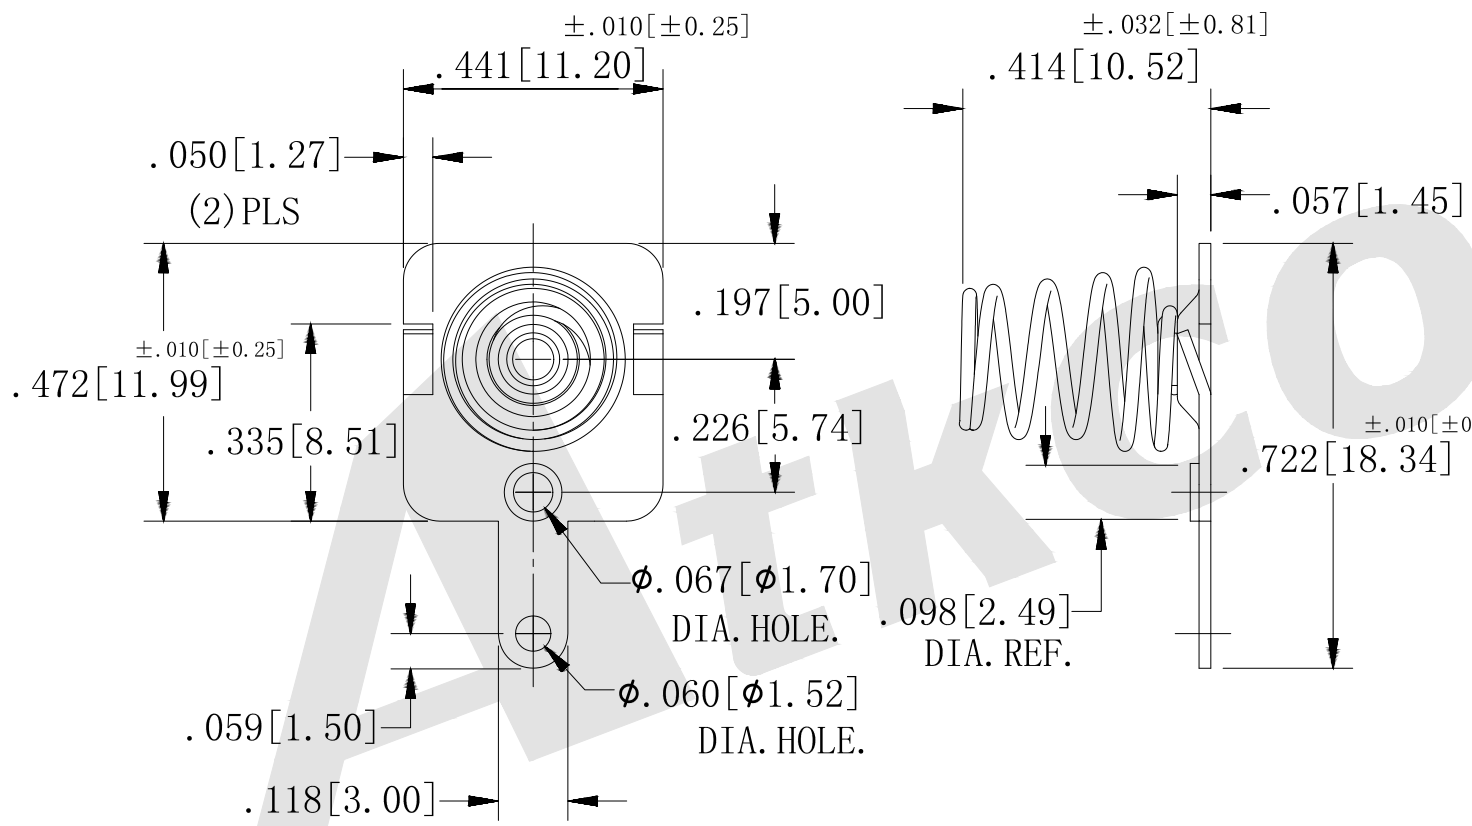

Unless Otherwise specified tolerance
X. ±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
DRAW ZLA DATE 21/07/2022
CHECK BobYang DATE 21/07/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: BATTERY CONTACTS FOR 309

DRAWING NO: BS-S-SI-B-CR309

PRODUCT NO: BS-S-SI-B-CR309

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		