

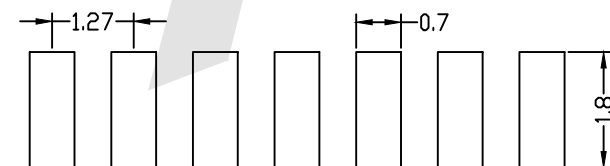
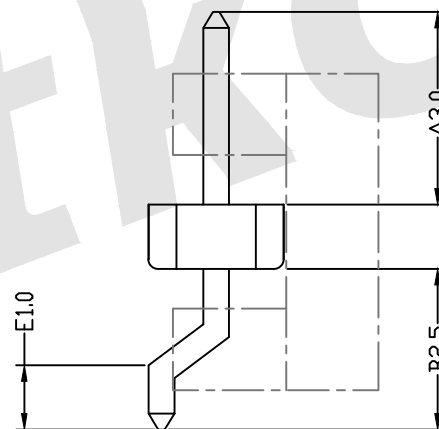


HSF

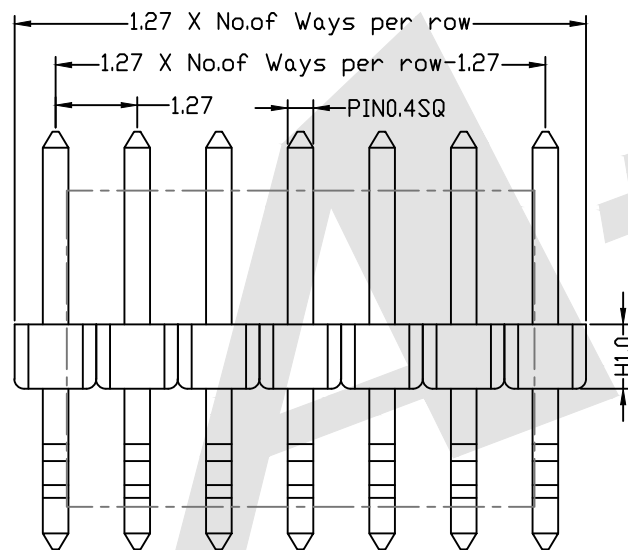

ROHS

1.27mm Pin Header Angle SMT Type Single Row

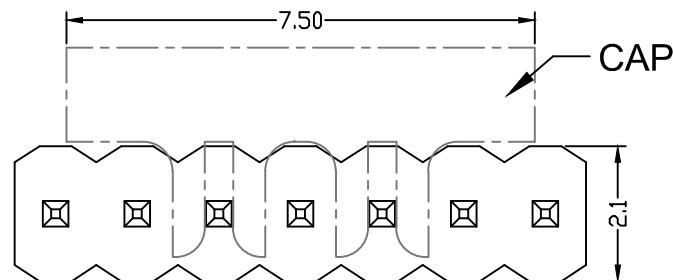

PCB LAYOUT

SPECIFICATION

| | |
|--------------------------|---------------------|
| Current Rating: | 1Amp |
| Insulation Resistance: | 1000M ohms min |
| Contact Resistance: | 20M ohms max |
| Dielectric Withstanding: | AC500V |
| Operating Temperature: | -65°C to +125°C |
| Contact Material: | Brass |
| Insulator Material: | PA6T,UL 94V-0 Black |

Ordering Code:

PHCM01 - X - X - S - A-B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts
01 To 50
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN: Tin
- ④ Connector Type
S:Single
- ⑤ Pin Length:
A: 0300=3.00mm
B: 0250=2.50mm
Please mark the desired length in the A/B
- ⑥ Insulator Material
B:PA6T
C:LCP
E:PA9T
- ⑦ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15


| | |
|--------------------|--------------------|
| SCALE: As Shown | UNIT: mm |
| DRAW ZLA | DATE 24/04/2022 |
| CHECK BobYang | DATE 24/04/2022 |

Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: 1.27mm Pin Header Angle Single Row SMT Type

DRAWING NO: PHCM01-XXS-0300-0250-XX

PRODUCT NO: PHCM01-XXS-0300-0250-XX



| REV | DESCRIPTION | DATE |
|-----|-------------|------|
| 1 | | |
| 2 | | |
| 3 | | |