

HSF



ROHS





### SPECIFICATION

Current Rating: 1.5 Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PA6T,UL 94V-0 Black

### Ordering Code:

PHDR08 - X - X - T - A - D - B - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts  
03 To 120
- ③ Contact Plating:  
 G0:Gold flash S0:Selective  
 G1:3u" Gold S1:Selective 3u"  
 G2:5u" Gold S2:Selective 5u"  
 G3:10u" Gold S3:Selective 10u"  
 G4:15u" Gold S4:Selective 15u"  
 G5:30u" Gold S5:Selective 30u"  
 SN: Tin
- ④ Connector Type  
T: Three
- ⑤ Pin Length:  
 A:0400=4.00mm  
 D:0075=0.75mm  
 B:0280=2.80mm  
 Please mark the desired length in the A/D/B
- ⑥ Insulator Material  
 A:PBT  
 B:PA6T  
 C:LCP  
 D:PA46  
 E:PA9T
- ⑦ Packing:  
 A:Tray  
 B:Bag  
 T:Tube  
 U:Tube+CAP  
 R:Tape&Reel  
 W:Tape&Reel+CAP

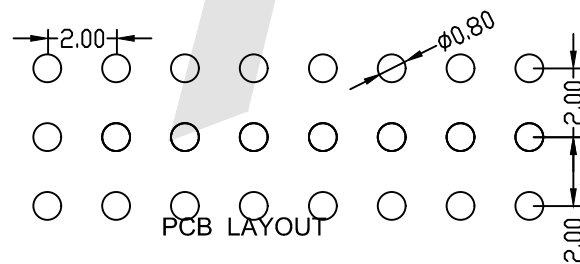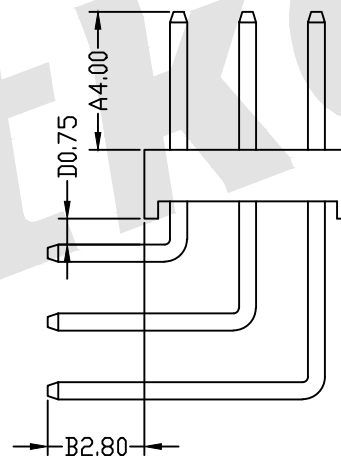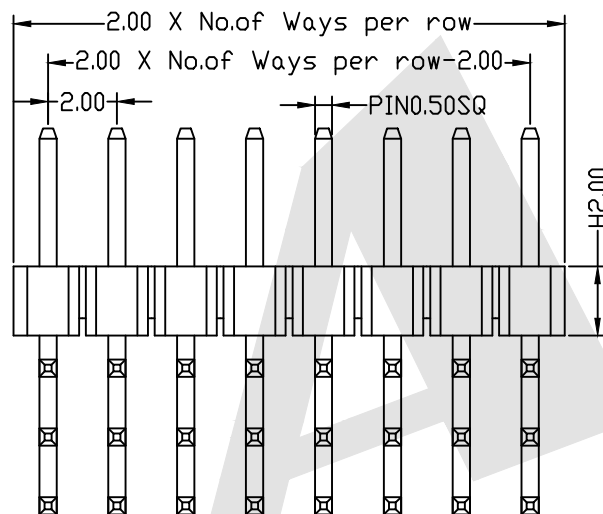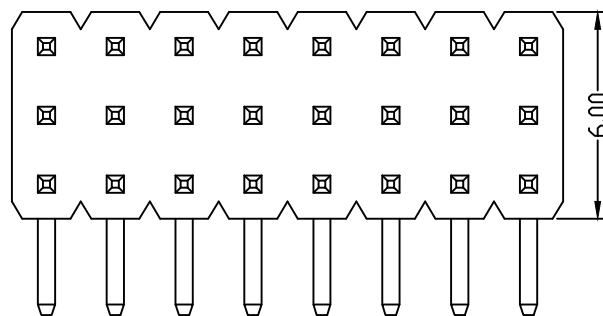


Unless Otherwise specified tolerance  
 X. XX: ±0.20  
 X. X: ±0.25 X. XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/04/2022
CHECK BobYang	DATE 24/04/2022

**Atkconn**® ATKCONN ELECTRONICS CO., LTD  
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE: 2.00mm Pin Header Three Row Angle Type
DRAWING NO: PHDR08-XXT-0400-0075-0280-XX
PRODUCT NO: PHDR08-XXT-0400-0075-0280-XX



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		