

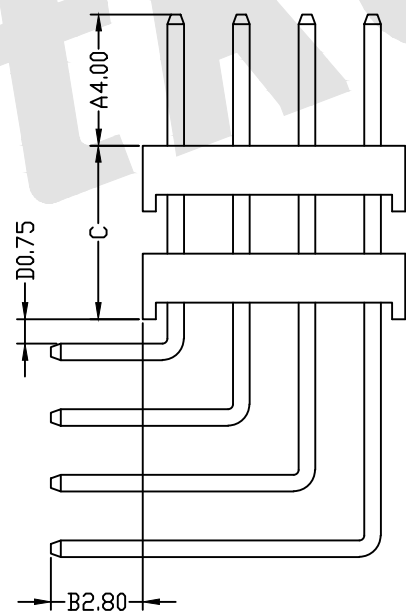
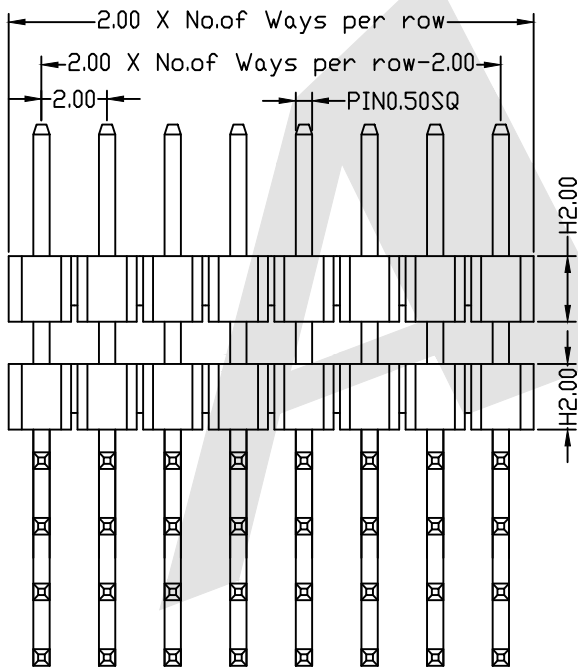


HSF

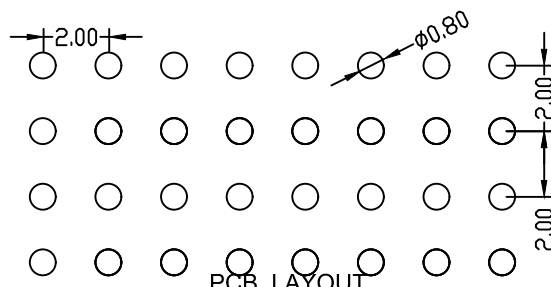

ROHS

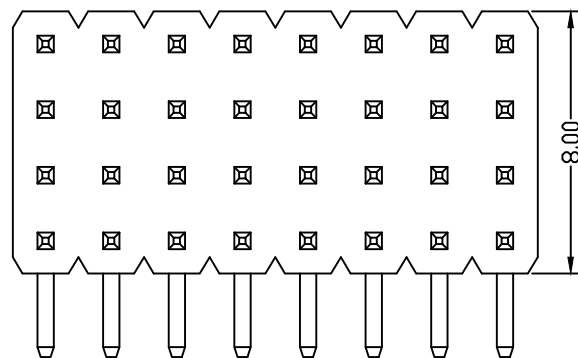

SPECIFICATION

Current Rating: 1.5 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T, UL 94V-0 Black

Ordering Code:

PHDR11 - X - X - F - A - D - B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 04 To 160
- ③ Contact Plating: G0:Gold flash S0:Selective G1:3U" Gold S1:Selective 3u" G2:5u" Gold S2:Selective 5u" G3:10u" Gold S3:Selective 10u" G4:15u" Gold S4:Selective 15u" G5:30u" Gold S5:Selective 30u" SN:Tin
- ④ Connector Type: F:Four
- ⑤ Pin Length: A:0400=4.00mm D:0075=0.75mm B:0280=2.80mm Please mark the desired length in the A/D/B
- ⑥ Insulator Material: A:PBT B:PA6T C:LCP D:PA46 E:PA9T
- ⑦ Packing: A:Tray B:Bag C:Tube U:Tube+CAP R:Tape&Reel W:Tape&Reel+CAP

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15


SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/04/2022
CHECK BobYang	DATE 24/04/2022

Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE:
2.00mm Pin Header Four Row Double Plastic Angle Type

DRAWING NO: PHDR11-XXF-0400-0075-0280-XX

PRODUCT NO: PHDR11-XXF-0400-0075-0280-XX



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		