

HSF



ROHS





SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHER06 - X - X - D - A - B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 02 To 80
- ③ Contact Plating:
 - G0:Gold flash S0:Selective
 - G1:3U" Gold S1:Selective 3u"
 - G2:5u" Gold S2:Selective 5u"
 - G3:10u" Gold S3:Selective 10u"
 - G4:15u" Gold S4:Selective 15u"
 - G5:30u" Gold S5:Selective 30u"
 - SN: Tin U:Tube+CAP
- ④ Connector Type:
 - D: Dual R: Tape&Reel
 - W: Tape&Reel+CAP
- ⑤ Pin Length:
 - A:0600=6.00mm
 - B:0300=3.00mm
 Please mark the desired length in the A/B
- ⑥ Insulator Material:
 - A:PBT
 - B:PA6T
 - C:LCP
 - D:PA46
 - E:PA9T

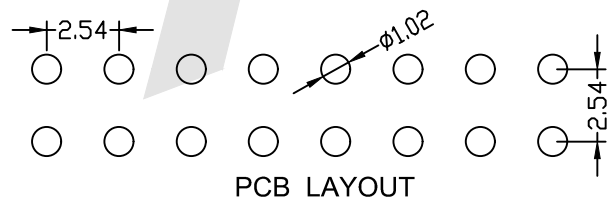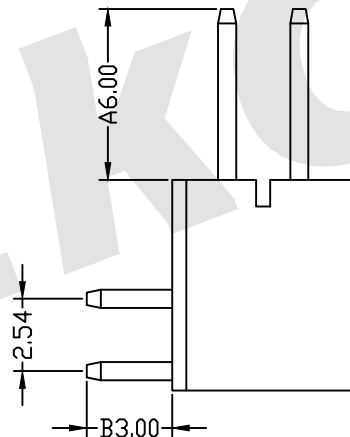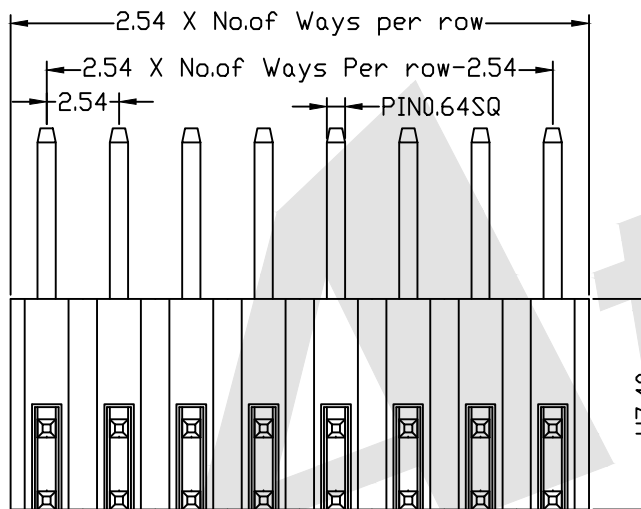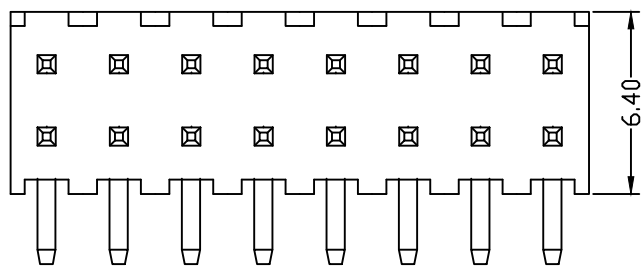


Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/04/2022
CHECK BobYang	DATE 24/04/2022

TITLE:	2.54mm Pin Header Dual Row Angle Type H:7.4
DRAWING NO:	PHER06-XXD-0600-0300-XX
PRODUCT NO:	PHER06-XXD-0600-0300-XX



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		