

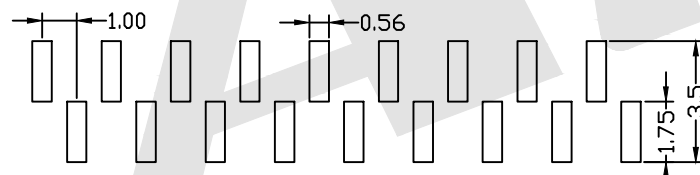

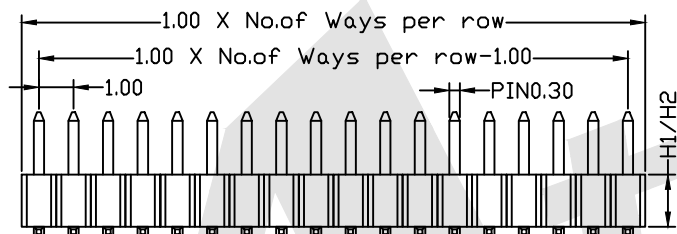



HSF

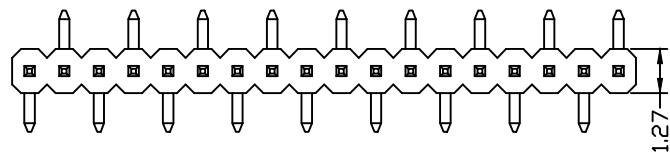

ROHS

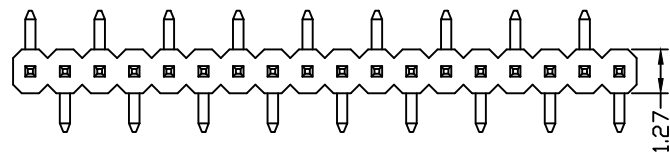

TYPE A

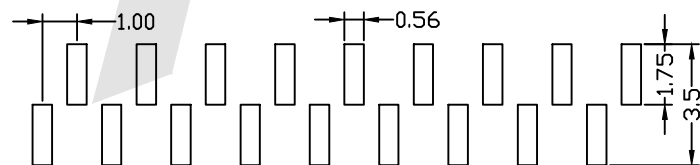

TYPE B

P. C. B LAYOUT

SPECIFICATIONS:

Current Rating: 0.75Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL94V-0, Color:Black

Ordering Code:

PHBM01 - X - X - S - A-W - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


- ① Series No:
- ② No. of Contacts: 01 To 50
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN: Tin
- ④ Connector Type:
 S:Single
- ⑤ Pin Length:
 A:0180=1.80mm
 W:0350=3.50mm
 Please mark the desired length in the A/W
- ⑥ Insulator Material:
 B:PA6T
 C:LCP
 E:PA9T
- ⑦ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP
- ⑧ Plastic High:
 H1: 1.0mm
 H2: 1.5mm
- ⑨ PCB Layout Option
 A:Type A
 B:Type B

Unless Otherwise specified tolerance
 X. XX: ±0.20
 X. X: ±0.25 X. XXX: ±0.15
 X. XX: ±0.35

Atkconn® ATKCONN ELECTRONICS CO., LTD
 Http://www.atkconn.com

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/04/2022
CHECK BobYang	DATE 24/04/2022

TITLE: 1.00mm Pin Header Single Row SMT Type



DRAWING NO: PHBM01-XXS-0180-0350-XXXX
 PRODUCT NO: PHBM01-XXS-0180-0350-XXXX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		