

HSF



ROHS

SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 1000MΩmin
 Contact Resistance: 20MΩmax
 Withstand Voltage: 500V AC/DC
 Contact Material: Brass





Contact PlatinSpecifications

Current Rating : 1.0 Amp
 Insulator Resistance : 1000 Megohms Min.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40° C~ +105°C
 Soldering Temperature : 260°C for 3~5sec Max.
 Contact Material : Copper Alloy
 Insulator Material: High Temperature Thermoplastic. UL 94V-0
 Standard : Nylon-6T(Black)
 Standard :Ting: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL 94V-0
 Operating Temperature: -40° C to +105° C

Ordering Code:


BHAS05 - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contacts
2-100P
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u"Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Color Insulator
 B:Black
 U:Blue
 W:White
- ⑤ Insulator Material
 B:PA6T
 C:LCP
 E:PA9T
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

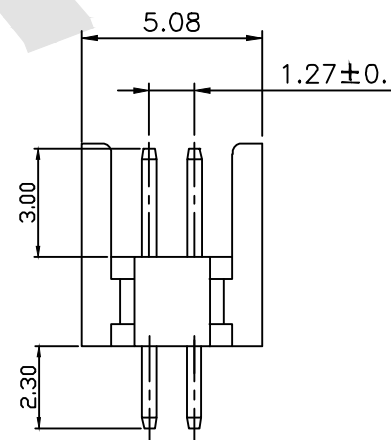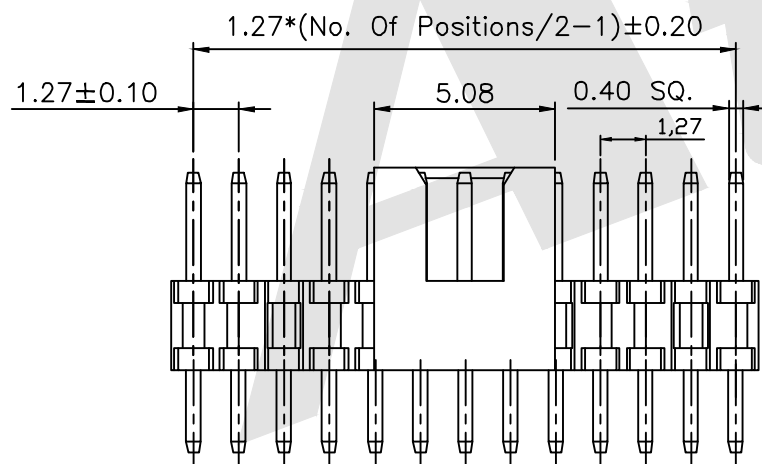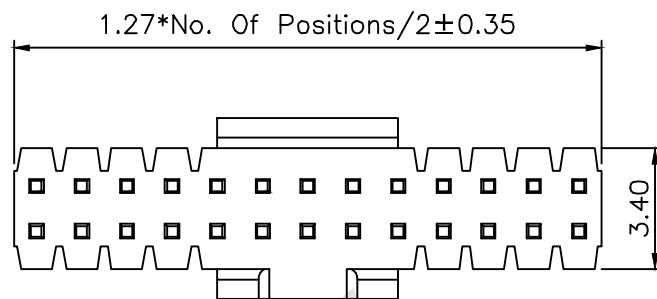

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/04/2022
 CHECK BobYang DATE 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

TITLE:
1.27*1.27MM BOX HEADER WITH THE KEY, 180° H=2.54MM
 DRAWING NO: BHAS05-XXXXXX
 PRODUCT NO: BHAS05-XXXXXX

REV	DESCRIPTION	DATE