





HSF

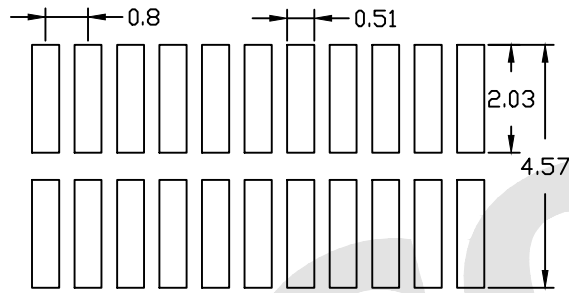

ROHS

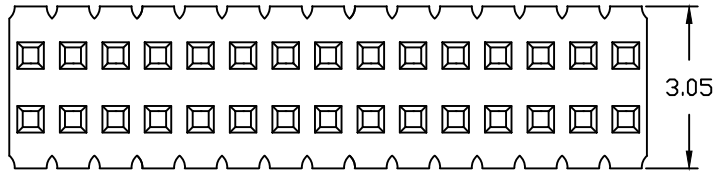

P. C. B LAYOUT

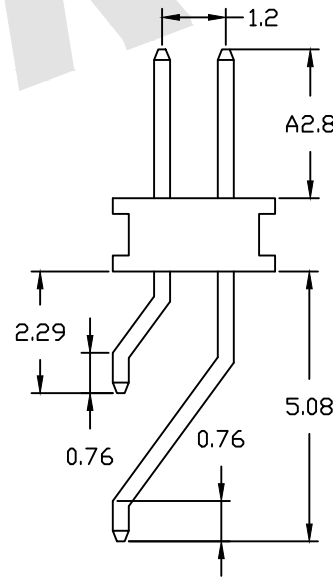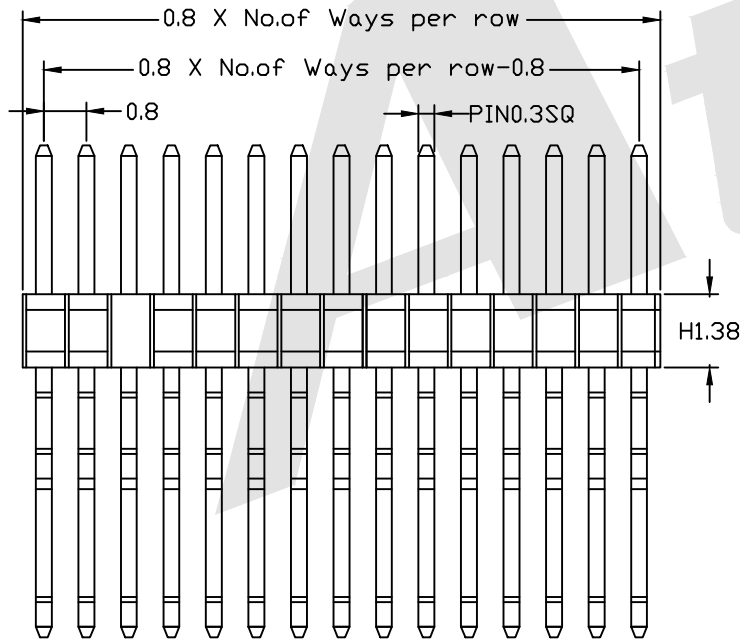

SPECIFICATIONS:

Current Rating: 0.75Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20m ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL 94V-0 Black


Ordering Code:

PHAR02 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{X}{3}$ - $\frac{X}{4}$ - $\frac{A-B}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type:
 D: Dual
- ⑤ Pin Length:
 A:0280=2.80mm
 B:0229=2.29mm
 Please mark the desired length in the A/B
- ⑥ Insulator Material:
 B:PA6T E:PA9T
 C:LCP
- ⑦ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/04/2022
CHECK BobYang	DATE 24/04/2022



Atkconn® ATKCONN ELECTRONICS CO., LTD
 Http://www.atkconn.com

TITLE: 0.8mm Pin Header Dual Row
 Angle SMT Type

DRAWING NO: PHAR02-XXD-0280-0229-XX

PRODUCT NO: PHAR02-XXD-0280-0229-XX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		